

Simulation de la propagation laser dans un plasma

R. Sentis


Travail avec

M. Doumic, F. Golse, S. Desroziers, F. Nataf, F. Duboc,...

Motivation.

Propagation de faisceaux laser dans les plasmas pour le projet Laser MégaJoule
(fusion par Confinement Inertiel).

Présentation du domaine

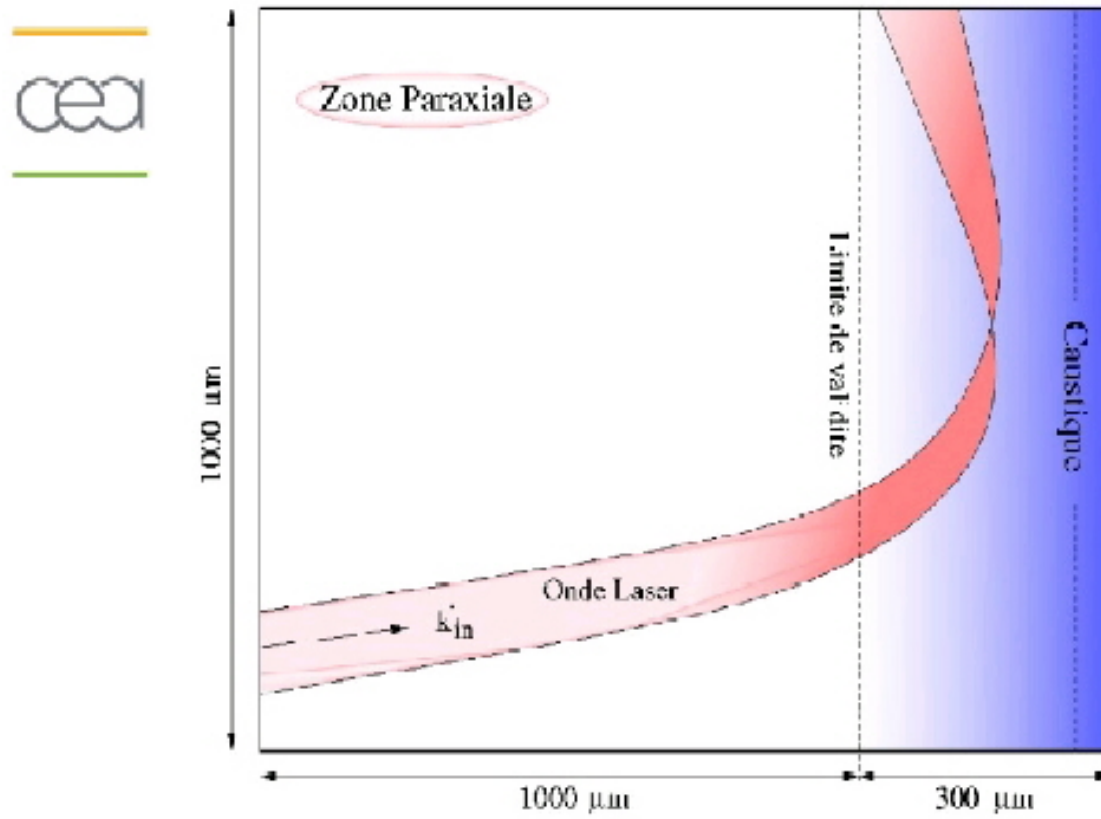

Plan

Description des 2 modèles.

Simulation modèle paraxial.

Simulation modèle eq. ondes fréquentielle.

Conclusion.

1 Description des modèles

Modèle théorique Euler-Maxwell.

...

A. Modèle eq. ondes fréquentielles.

$N(t, \mathbf{x})$ densité électronique adimensionnée par la densité critique.

$\mathbf{U}(t, \mathbf{x})$ vitesse du plasma.

$\Psi(t, \mathbf{x})$ champ laser

c, c_s , vitesse de la lumière, du son,

$2\pi/k_0$, longueur d'onde du laser.

$$\begin{aligned}\frac{\partial}{\partial t}N + \nabla(N\mathbf{U}) &= 0 \\ \frac{\partial}{\partial t}(N\mathbf{U}) + \nabla(N\mathbf{U}\mathbf{U}) + c_s^2\nabla N &= -\gamma_p N \nabla|\Psi|^2 \\ 2i\frac{1}{c}\frac{\partial}{\partial t}\Psi + \frac{1}{k_0}\Delta\Psi + k_0(1-N)\Psi + \frac{2i}{c}\nu\Psi &= 0\end{aligned}$$

ν , coefficient d'absorption,

γ_p coefficient dependant du type d'ion,

sachant que $\alpha^{in}(t, \mathbf{x})$ est non oscillante en \mathbf{x} , la condition sur le bord éclairé

$$\left(\frac{\partial}{\partial \mathbf{n}} - ik_0|\mathbf{K}^{in}|\right) \left(\Psi - e^{ik_0\mathbf{K}^{in}\cdot\mathbf{x}}\alpha^{in}\right) = 0, \quad \mathbf{K}^{in} = \mathbf{e}_b\sqrt{1 - N^{in}}, \quad \mathbf{e}_b \text{ fixed}$$

On pose $\mathbf{x} = (x, y)$.

Hyp. pour simulations $N(t, x, y) = N_0(t, x) + \delta n(t, x, y), \quad \delta n \ll N_0$

.B. Modèle Paraxial

Hyp. sup. : N_0 fonction très faiblement variable en espace, indépendante du temps,

Approximation W.K.B., (equation eikonale): enveloppe spatiale

$$\Psi(t, \mathbf{x}) = e^{ik_0 \mathbf{K} \cdot \mathbf{x}} E(t, \mathbf{x}), \quad |\mathbf{K}(\mathbf{x})| = \sqrt{1 - N_0}$$

$$i \left(\frac{2}{c} \frac{\partial}{\partial t} + 2\mathbf{K} \cdot \nabla + \nabla \cdot \mathbf{K} + \frac{2\nu}{c} \right) E + \frac{1}{k_0} \Delta_{\perp}^K E - k_0(N - N_0)E = 0$$


$$\text{où : } \Delta_{\perp}^K \bullet = \nabla \cdot \left[\left(\bar{1} - \frac{\overline{\mathbf{K}\mathbf{K}}}{|\mathbf{K}|^2} \right) \nabla \bullet \right]$$

avec une bonne condition sur le bord entrant.

2 Simulation avec le modèle paraxial

Pour Euler, méthode Lagrange + advection.

Pour Paraxial, méthode marche en espace avec FFT.

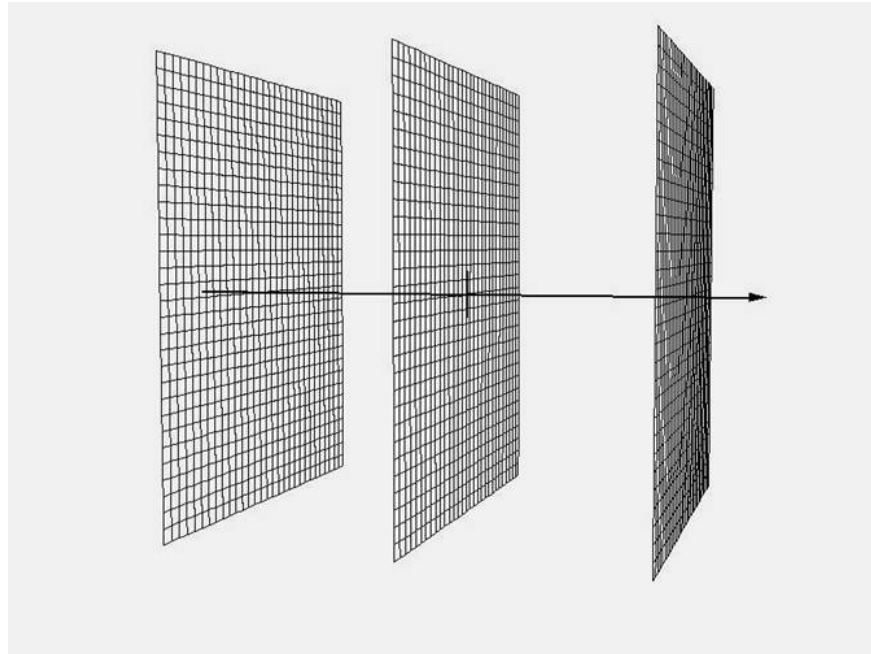

3 Simulation modèle eq. ondes fréquentielle

Implicit time discretization \Rightarrow Helmholtz problem (finite difference type).

Boundary conditions PML, for $y = 0$ and $y = y_{max}$.

Difficulties

- Multiscale problem. Spatial step for Helmholtz 5 or 10 times smaller than the spatial step for Euler
- Coupling the Euler equations with the Helmholtz \Rightarrow interpolation between the two grids
- Helmholtz problem with variable coefficients in a non symmetric form (due to PML)
- Realistic computation \Rightarrow hundreds of millions of unknowns

Principle. Thanks to $\delta N(x, y) \ll N_0(x)$, solution of

$$k_0^{-2} \Delta \psi + i\mu\psi + (1 - N_0(x))\psi - \delta_N(x, y)\psi = i\mu\psi^{pre}$$

by a iterative Krilov method, with a preconditioning by

$$k_0^{-2} \Delta \psi + i\mu\psi + (1 - N_0(x))\psi = \dots$$

The linear system to be solved has the following form : beside the interior domain, two small zones for to the PML.

$$\begin{pmatrix} P_1 & C_1 & 0 \\ C_3 & B + D_{\delta N} & C_4 \\ 0 & C_2 & P_2 \end{pmatrix} \psi = F, \quad (1)$$

$$\text{with : } A_D = \begin{bmatrix} P_1 & 0 & 0 \\ 0 & B & 0 \\ 0 & 0 & P_2 \end{bmatrix}, \text{ and } A_E = \begin{bmatrix} 0 & C_1 & 0 \\ C_3 & D_{\delta N} & C_4 \\ 0 & C_2 & 0 \end{bmatrix}.$$

- **Remarks**

- The matrices P_1 , P_2 are factorized by a direct method
- B is a very large matrix but with a simple structure

Cyclic Reduction for solving $Bu = f$ (1/2)

$$Bu = \begin{bmatrix} A & -T & & & \\ -T & A & -T & & \\ & \ddots & \ddots & \ddots & \\ & & & -T & A \end{bmatrix} \begin{bmatrix} u_1 \\ u_2 \\ \vdots \\ u_n \end{bmatrix} = \begin{bmatrix} f_1 \\ f_2 \\ \vdots \\ f_n \end{bmatrix}$$

where $T = cI$ and u_k vectors of dimension n_y (simulation domain $n_x \times n_y$ points).

Recursively and in parallel:

$$\begin{array}{l} \text{To be solved :} \\ \begin{array}{rcccccc} -Tu_{i-2} & + & Au_{i-1} & - & Tu_i & & = & f_{i-1} \\ & & -Tu_{i-1} & + & Au_i & - & Tu_{i+1} & = & f_i \\ & & & & -Tu_i & + & Au_{i+1} & - & Tu_{i+2} & = & f_{i+1} \end{array} \end{array}$$

$$\text{Reduction :} \quad -TA^{-1}Tu_{i-2} + (A - 2TA^{-1}T)u_i - TA^{-1}Tu_{i+2} = \dots$$

$$\text{Redistribution :} \quad u_{i-2}, u_i \implies u_{i-1}$$

Cyclic Reduction for solving $Bu = f$ (2/2)

- Via a LR (Parlett) diagonalization process (much cheaper than classical QR method):

$$A = Q\Lambda^{(0)}Q^T, \quad T = Q\Gamma^{(0)}Q^T \text{ et } QQ^T = I$$

- Induction formulas

$$\begin{aligned} T^{(r)} &= (T^{(r-1)})^2 (A^{(r-1)})^{-1} & \Gamma^{(r)} &= (\Gamma^{(r-1)})^2 (\Lambda^{(r-1)})^{-1} \\ A^{(r)} &= (A^{(r-1)})^{-1} - 2T^{(r)} & \Lambda^{(r)} &= (\Lambda^{(r-1)})^{-1} - 2\Gamma^{(r)} \end{aligned} \implies$$

- Elimination

$$x = (A^{(r-1)})^{-1}(y + T^{(r)}z) \implies X = (\Lambda^{(r-1)})^{-1}(Y + \Gamma^{(r)}Z)$$

- Redistribution

Constraints

- Storage of the full $nx \times nx$ complex matrix Q
- Efficient matrix-vector products

Computer implementation

- Platform **HERA** (C++)
- BLAS routines
- Complex subroutine
- Hybrid MPI (internode) / Multithreading pthread (intranode)

CPU time per GMRES iteration

Increased size problem: the number of points in both directions are doubled

Nb Procs	4	16	64	256
# d.o.f. $\times 10^6$	1.6	6.3	25.4	101.6
CPU LR	3s	12s	48s	189s
CPU per GMRES iteration	1	2.1	4.2	8.5

- CPU time $\sim n_x^2 n_y$

Numerical simulations

- $L_x = 2000 \lambda_0, L_y = 2000 \lambda_0$
- 10 points per wavelength in the Helmholtz zone
- 200 millions unknowns in the Helmholtz zone, 16 millions fluid unknowns.
- Density N_0 linear from 0.1 to 0.95 (critical density)

++-++

ON THE LARGEST COMPUTER CENTER in France

- 200 processors.
- 240s per time iteration (about 12 Krilov iterations)
- Laser simulated during a physical time of 22 ps
- Elapsed time for the full simulation: 20 hours.

Conclusions

Quand δ_N augmente, le nombre d'iterations de Krilov augmente.

Les problèmes d'optique pour les plasmas sont un vrai challenge de calcul scientifique.

Problèmes liés aux instabilités Raman et Brillouin.